

# 88 kW Triton Tier 4 Final Diesel Generator

## TP-JD88-T4F



Triton offers a complete line of Tier 4 Final diesel generators from 15 to 1500 kVA. Powerful and Dependable, our Tier 4 products can be open, mobile or stationary, depending upon your requirement. Powering everything from agriculture to health care to government institutions.



### FEATURES

- ✓ Fully Integrated T4F Power Generation System
- ✓ Prototype-tested, Factory Built and Fully Tested
- ✓ Open-Source Components and Controls
- ✓ 125% Full Containment for Fluids
- ✓ Available in Open, Enclosed and Mobile
- ✓ Sub-Base Tank up to 45 hours

### OPTIONS:

- Extended UL Fuel Tank
- Paralleling Systems
- UL2200 and CSA Available
- Extended Warranty
- Trailer with Extended Fuel Capacity
- Variety of Connections Available
- Over 100 different options available (see below)



### OUTPUT RATINGS

| Available Voltages<br>at 60Hz                      | Standby |     | Prime |     |
|----------------------------------------------------|---------|-----|-------|-----|
|                                                    | kW      | kVA | kW    | kVA |
| Single Phase, 1.0 Power Factor<br>110/220, 120/240 | 75      | 75  | 68    | 68  |
| Three Phase, 0.8 Power Factor<br>120/208, 277/480  | 88      | 110 | 80    | 100 |
| *Additional Voltages Available                     |         |     |       |     |

### OUR TIER FOUR FINAL ENGINES

The John Deere 4045HFG04 powers Triton's TP JD88 T4F and TP RJD100 T4F generators, delivering Tier 4 Final and Stage IV compliant performance. This 4.5 L, 4-cylinder engine is turbocharged and air-to-air aftercooled with a wastegated turbo, SCR, DOC, and cooled EGR. Its compact footprint, 4-valve head, and HPCR fuel system provide precise control and strong low-end torque—ideal for mobile, standby, and rental power in emissions-regulated markets.

### OUR ALTERNATORS

Triton Mobile are equipped with Leroy-Somer alternators. Utilizing the latest technologies and with outputs extending from 5 to 5,000 kW, these alternators are designed to deliver superior efficiencies in Standby, Continuous and Prime generator applications worldwide.

# 88 kW Triton Tier 4 Final Diesel Generator

## TP-JD88-T4F



### ENGINE INFORMATION

|                                         |                 |
|-----------------------------------------|-----------------|
| <i>Engine Make</i>                      | John Deere      |
| <i>Model</i>                            | 4045HFG04       |
| <i>Tier Rating</i>                      | Tier 4 Final    |
| <i>Engine Speed (RPM)</i>               | 1800            |
| <i>Engine Power Output at rated RPM</i> | 99 kWm / 133 HP |
| <i>Cooling</i>                          | Radiator Cooled |
| <i>Aspiration</i>                       | Turbocharged    |
| <i>Total Displacement (Liter)</i>       | 4.5             |
| <i>No. of Cylinders and Build</i>       | 4, in line      |
| <i>Bore and Stroke</i>                  | 106 x 127       |
| <i>Compression Ratio</i>                | 17.0:1          |
| <i>Governor</i>                         | Electronic      |
| <i>Fuel Consumption (L/hr)</i>          |                 |
| <i>Full Load</i>                        | 17.5            |
| <i>75% Load</i>                         | 13.8            |
| <i>50% Load</i>                         | 10.4            |
| <i>Oil Capacity (Liter)</i>             | 14.7            |
| <i>Coolant Capacity (Liter)</i>         | 23.7            |

### ALTERNATOR INFORMATION

|                                              |                                                          |
|----------------------------------------------|----------------------------------------------------------|
| <i>Manufacturer</i>                          | Leroy Somer                                              |
| <i>Design</i>                                | Brushless single bearing, revolving field                |
| <i>Stator</i>                                | 2/3 pitch                                                |
| <i>Rotor</i>                                 | Single bearing, flexible disc                            |
| <i>Insulation System</i>                     | Class H                                                  |
| <i>Standard Temperature Rise</i>             | 125 -163°C Continuous                                    |
| <i>Exciter Type</i>                          | Self Excited                                             |
| <i>Phase Rotation</i>                        | A (U), B (V), C (W)                                      |
| <i>Alternator Cooling</i>                    | Direct drive centrifugal blower fan                      |
| <i>AC Waveform Total Harmonic Distortion</i> | No load < 1.5%. Non distorting balanced linear load < 5% |
| <i>Telephone Influence Factor (TIF)</i>      | <50 per NEMA MG1-22.43                                   |
| <i>Telephone Harmonic Factor (THF)</i>       | <2%                                                      |

### DEEP SEA 7420 DIGITAL CONTROLLER

- Adaptable for a wide variety of single gen-set applications, supporting diesel, gas and petrol engines.
- Monitors engine speed, oil pressure, coolant temperature, frequency, voltage, current, power and fuel level, giving you comprehensive engine and alternator protection.
- Easy USB configuration via the DSE PC Suite or directly through the controller's panel.
- Additional Synchronization Model (DSE8510) available upon request on customized equipment.



Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice. All photos are representative and may not reflect exact model



## STANDARD ITEMS

- ✓ Engine System:
  - Air Cleaner
  - Commercial Grade Exhaust (Enclosed Versions)
  - Expanded Metal Safety Guards
- ✓ Fuel System
  - Primary Fuel Filter
  - Flexible Fuel Lines
- ✓ Cooling System
  - Factory Installed Radiator
  - Radiator Drain Extension
- ✓ Electrical System
  - Unit Mounted Mainline Circuit Breaker
  - Battery Charging Alternator
  - Battery Tray and Cables
- ✓ Generator Set
  - Mounted on Heavy Duty Steel Base Frame
  - Anti-Vibration Pads between Engine/Alternator and Frame
  - Full Factory Load Bank Testing
- ✓ Alternator
  - Single or Three Phase Available
  - Class H Insulation
- ✓ Enclosure (if selected)
  - Heavy Duty Steel Enclosure (Aluminum Options)
  - Powder Coated Finish
  - Easy Access to All Service Points
  - Fully Sound Attenuated
  - Easy to Transport


## OPTIONAL ITEMS

- ✓ Engine System:
  - Upgraded Exhaust Silencers (Hospital, Residential, Critical)
  - Heavy Duty Air filters
  - Oil Drain Extension
  - Oil Heater
  - Block Heater (Standard and Circulating)
- ✓ Fuel System
  - Multi-Valve Fuel Connections
  - Fuel Heater
- ✓ Electrical System
  - Battery Charger (Standard, Float Type and Solar)
  - Additional Circuit Breakers
  - Shunt Trips
  - Electrically Controlled Breakers
  - Remote Emergency Stop Switch
  - Remote Monitoring
  - Paralleling Systems
  - Electrical Connections (Cam-Locks, Reefer Plugs, Distro Panel, and more)
  - Multi Voltage Selector Switches
- ✓ Cooling System
  - Upgraded Radiator Systems
  - Marine Grade Coating
- ✓ Enclosure
  - Aluminum Enclosure
  - Ultra-Quiet Enclosure
  - 20 and 40' Container Packages
  - Custom Paint Colors
  - Rodent Guards
- ✓ Alternator
  - 600 Voltage
  - Medium Voltage
  - Two Bearing
  - Tropicalization
  - Anticondensation Heaters
  - PMG
- ✓ Additional Options
  - Fire Suppression Systems
  - Seismic Isolators
  - Remote Control Systems
  - Enclosure Lights
  - Cold and Extreme Weather Packages
  - NFPA 110 Compliance
  - Standard and Custom Fuel Tanks
  - Standard and Custom Trailers
  - Please inquire, Triton can assist in engineering nearly any option

## WEIGHT AND DIMENSIONS

### Enclosed

|                 |      |
|-----------------|------|
| Length (mm)     | 3160 |
| Width (mm)      | 1172 |
| Height (mm)     | 1977 |
| Dry Weight (kg) | 2434 |
| Fuel Tank (L)   | 680  |

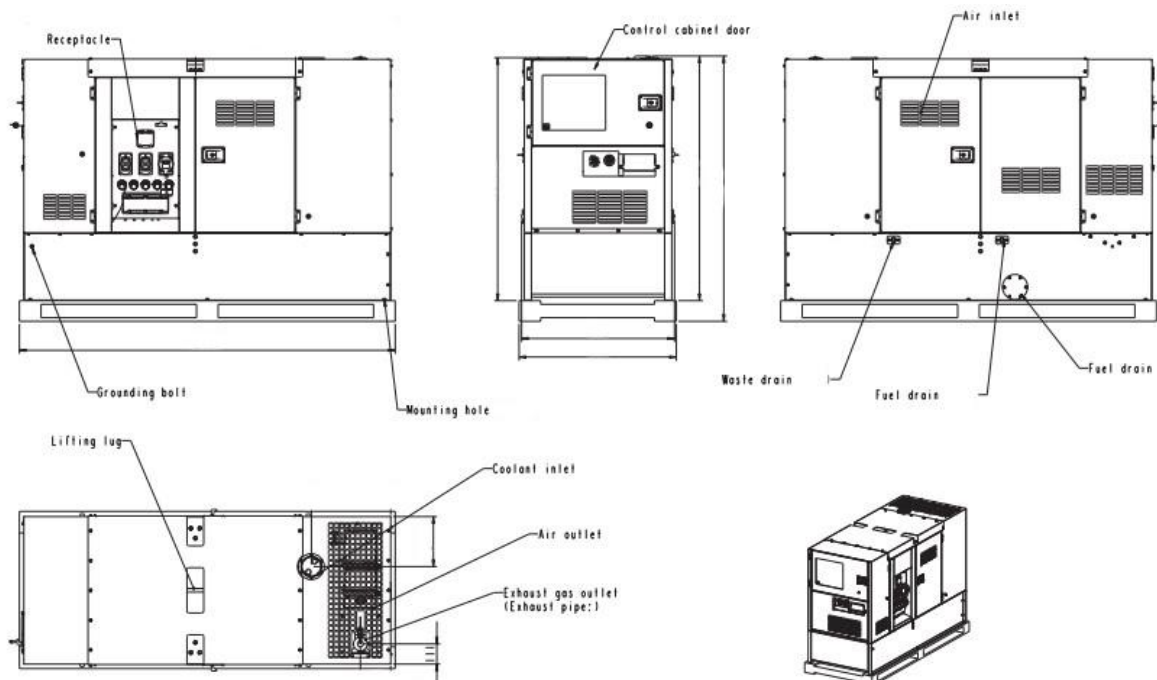

\*Drawings are representative only and do not reflect actual product

## ENCLOSURE FEATURES AND BENEFITS

- ✓ Made of high-quality steel and completely powder coated. The paint has a three-step process ensuring protection against erosion, scratching, and corrosion.
- ✓ Advanced water and dust proof design of service doors and canopy board, effectively stopping intrusion from natural elements.
- ✓ Noise reduction enhanced by an exhaust silencer and high quality interior acoustic lining that is sound absorbent and fire-retardant
- ✓ Built for easy installation, maintenance and transport
- ✓ Lifting eyes located at base make it easier to move and transport.
- ✓ Easy to Maintain with Access on both sides, includes Integral base drainage outlets, modular enclosure for easy parts replacement.

TRITON POWER CORP  
8511 NW 61 STREET MIAMI, FL USA  
305-592-6300 Fax: 305-592-5900  
email: [info@tritonpower.com](mailto:info@tritonpower.com)  
website: [tritonpower.com](http://tritonpower.com)

Manufacturer reserves the right to make changes in model, technical specifications, color, equipment and accessories without prior notice. All photos are representative and may not reflect exact model